



SystemView2000 Cloud Advertisement Web Manage Quick Start Guider V3.1


By Henry (20170206)



Solution



Application Note



Datasheet

Document Title:	SystemView2000 Web Manage
Version:	3.1
Date:	2017-2-6
Status:	Release
Document Control ID:	SystemView2000 Web Manage V3.1

General Notes

SYSTECH offers this information as a service to its customers, to support application and engineering efforts that use the products designed by SYSTECH. The information provided is based upon requirements specifically provided to SYSTECH by the customers. SYSTECH has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by SYSTECH within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of Systech copying of this document and giving it to others and the using or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights reserved in the event of grant of a patent or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Systech 2009

Version History

Date	Version	Description of Change	Author
2012-10-11	V1.00	New version	Henry.Xu
2013-4-20	V1.04	Add some example	Henry.Xu
2014-2-5	V2.00	Add some picture for demo	Henry.Xu
2014-9-7	V2.40	Modify description as server codes updated	Henry.Xu
2015-9-7	V2.6.1	Modify as more features added	Henry Xu
2016-11-2	V2.8	Server relocation	Henry Xu

VERSION HISTORY	3
1 WHAT YOU NEED:.....	5
2 LOGIN.....	5
3 LOGIN OUT	6
4 START DESIGN DISPLAY LAYOUT	6
STEP1 ADD A NEW LAYOUT , BY CLICK <DESIGN> -MENU & <ADD LAYOUT> -BUTTON	7
STEP2 SET THE TEMPLATE.....	7
STEP3 THEN WE GET ONE NEW BLANK LAYOUT	7
STEP4 ADD ONE NEW REGION FOR THIS LAYOUT	8
STEP5 DRAG AND MOVE REGION POSITION & ADJUST REGION SIZE	8
STEP6 ASSIGNED MEDIA FOR ONE NEW REGION	9
STEP7 CLICK <SAVE POSITION>-BUTTON TO SAVE YOUR ALL DESIGN	12
STEP8 REPEAT AS ABOVE STEPS, ADD SOME REGION&MEDIA AND FINISHED TO DESIGN WHOLE LAYOUT	13
5 SEND THE DISPLAY LAYOUT TO SCREEN/PLAYER TERMINAL PLAY LIST& SCHEDULE	16
6 SCHEDULE OPERATION	20
(1) LOOK THROUGH SCHEDULE TASK	20
(2) READ & EDIT ONE SCHEDULE DETAIL.....	21
(3) DELETE ONE SCHEDULE TASK	22
(4) SET REPEAT TASK AS PRESET TIME-PERIOD	22
7 MORE INFO & ONLINE SUPPORT	23

1 What you need:

- 1) One PC
- 2) Internet browser (Recommend :: **Google Chrome** / **Fire Fox**)

(one tip : NOT use browser with IE core, and our software NOT support it)

2 Login

Open your browser, login cloud management server with your private user name and password, or with testing account as following :


Our web manage address:

<http://47.89.194.83:81/systech/>

Account for test :


User Name 1: **test110**
PassWord: **1973**

User Name 2: **test800**
PassWord: **1973**



3 Login Out

Click <LogOut> -Button in <User Name> -Menu at upper right corner .

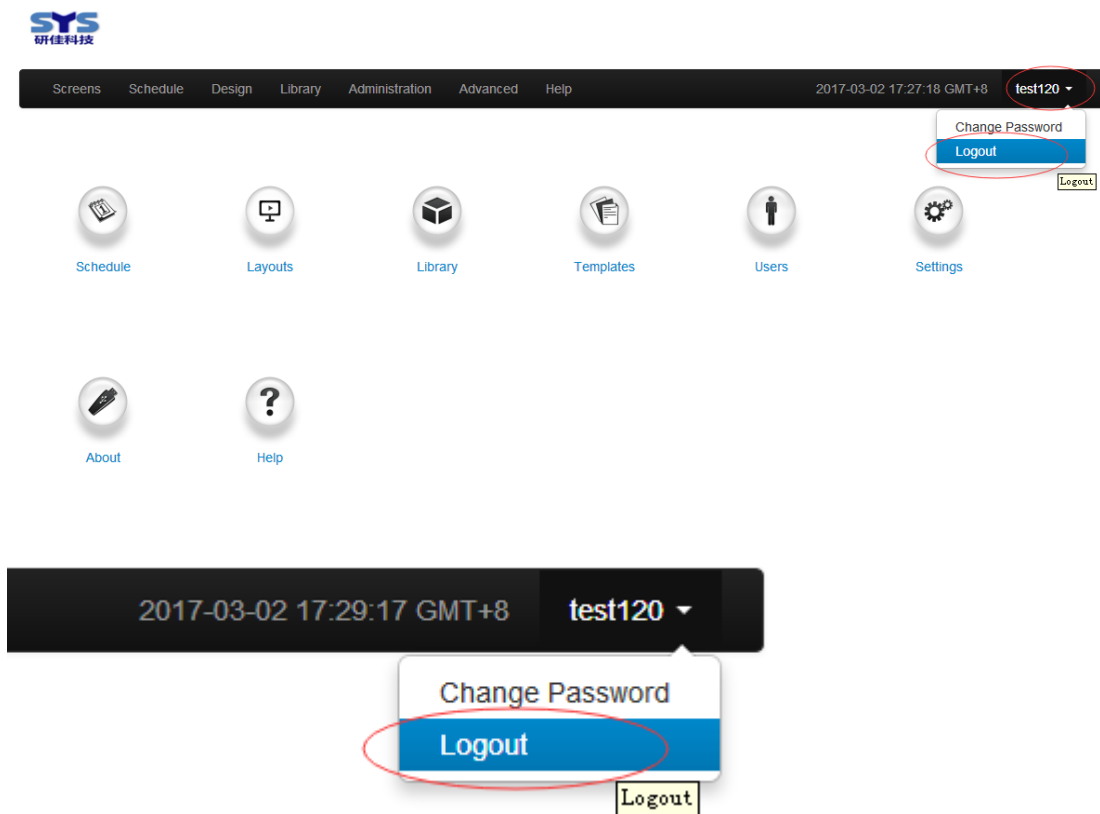


4 Start design display layout

Each display layout are scheduled to appear on screens via digital signage player .

Each layout can be divided into multi regions, and you may assign various media format for each region , including Picture / Video / Text / Webpage... etc

Step1 Add a new layout , by click <Design> -Menu
& <Add Layout> -Button

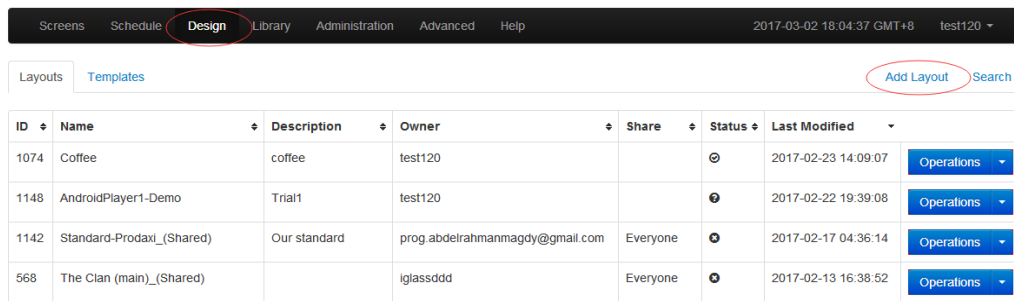


The screenshot shows the 'Design' menu highlighted in the top navigation bar. Below it, the 'Layouts' tab is active, displaying a table of existing layouts. The 'Add Layout' button is circled in red in the top right corner of the layout management area.

ID	Name	Description	Owner	Share	Status	Last Modified	Operations
1074	Coffee	coffee	test120		⊙	2017-02-23 14:09:07	Operations
1148	AndroidPlayer1-Demo	Trial1	test120		⊙	2017-02-22 19:39:08	Operations
1142	Standard-Prodaxi_(Shared)	Our standard	prog.abdelrahmanmagdy@gmail.com	Everyone	⊙	2017-02-17 04:36:14	Operations
568	The Clan (main)_(Shared)		lglassddd	Everyone	⊙	2017-02-13 16:38:52	Operations

Step2 Set the Template


Choose the correct template option per ratio of your screen terminal

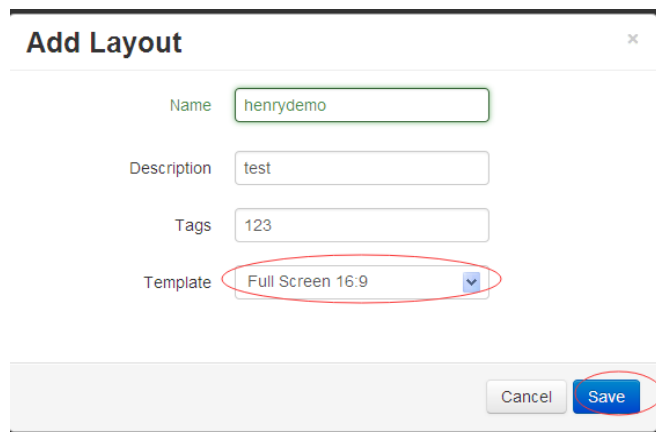

The screenshot shows the 'Add Layout' dialog box. The 'Name' field is 'henrydemo', 'Description' is 'test', and 'Tags' is '123'. The 'Template' dropdown menu is set to 'Full Screen 16:9' and is circled in red. The 'Save' button is also circled in red at the bottom right.


Step3 Then we get one new Blank Layout

Layout Design - 0505

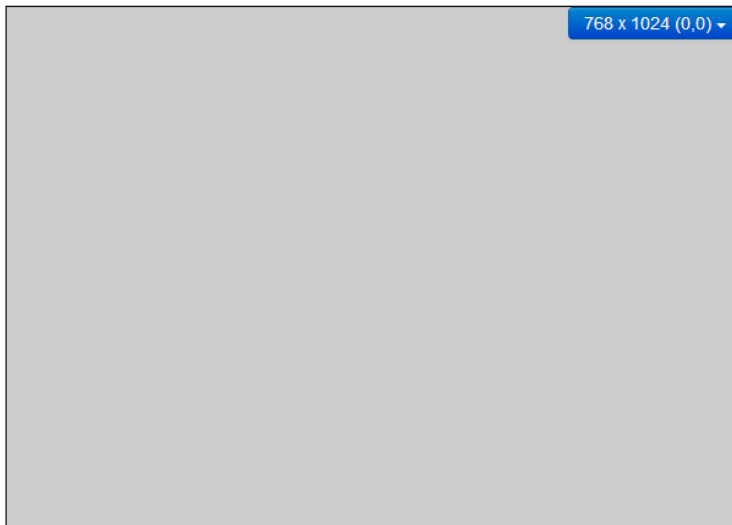[Add Region](#) [Background](#) [Setting](#) [Schedule Now](#) [Save Template](#)

Step4 Add one new region for this layout

Pls click <Add Region> -Button, and one new Region be created at left-top.

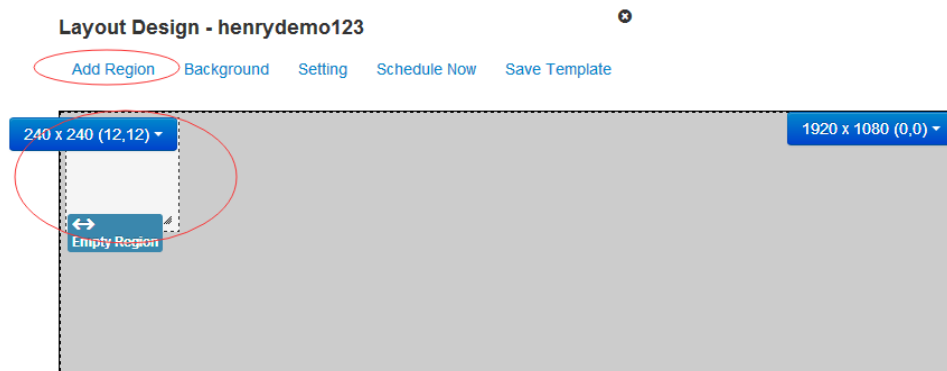

Step5 Drag and move region position & adjust region Size

You can drag Region to correct position on the whole layout.


You also can adjust region Size as your wants.

Drag-Move Region Position way:

When **keep to press left-key into Region**, **move mouse** to drag the Region


Enlarger Region Size way:

Click **the Enlarger Icon** at right-bottom of Region, then you can drag it to change Region Size.

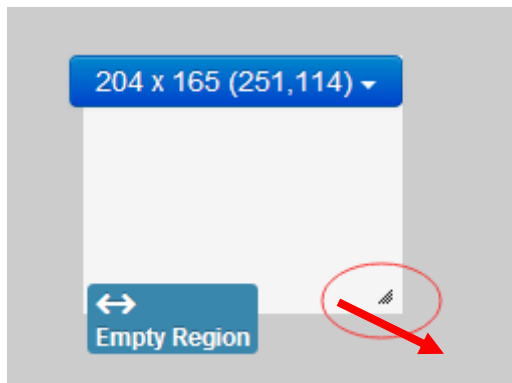


Step6 Assigned media for one new Region

Click Drop-Menu, and <Assign Content> -Menu

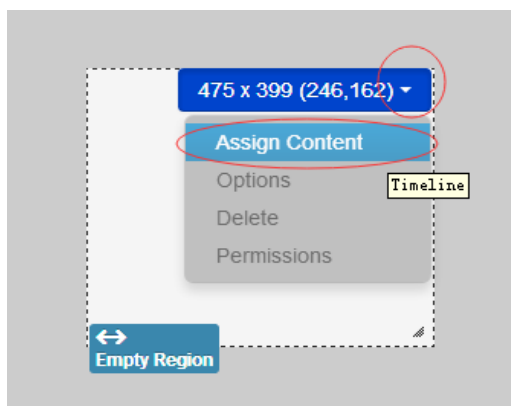


Choose one media per your request

If the media already be sent to server as before, you can find it in <Library>

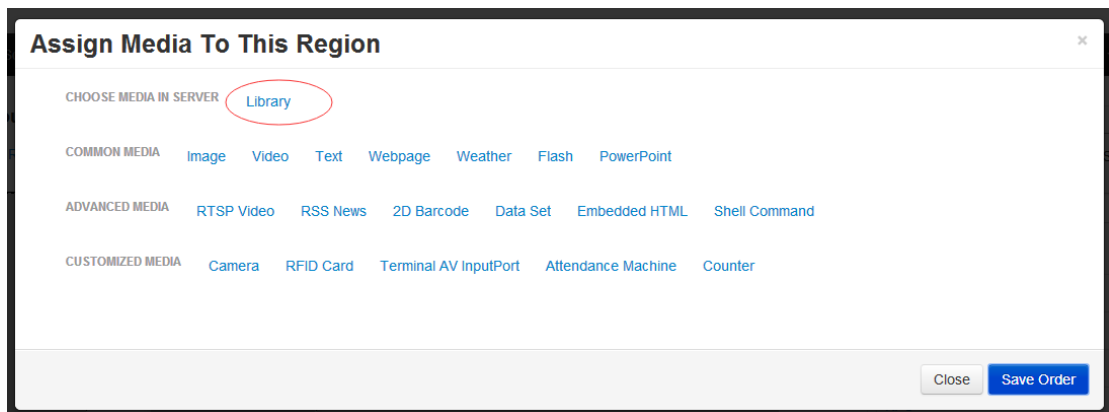


(note: For customized media , pls mail to us for detail)

If this media is NOT in Server Library, you need upload it as new media

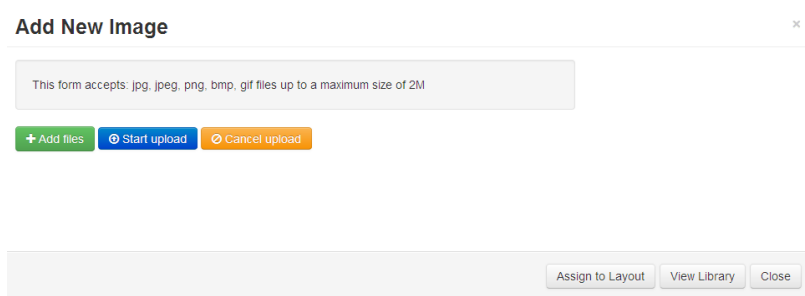

Click <Add Files>-Button to choose your files in your PC,
Then Click <Start>-Button to upload it to server,

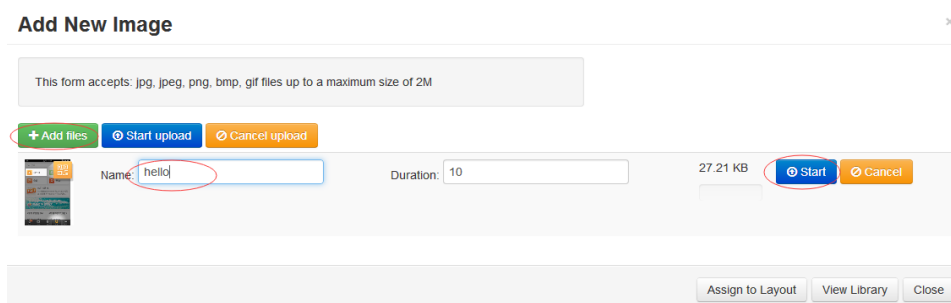

After finishing to upload it , Click <Assign to Layout>-Button to set this new media to the new region

Add New Image

This form accepts: jpg, jpeg, png, bmp, gif files up to a maximum size of 2M

[+ Add files](#) [Start upload](#) [Cancel upload](#)

weibo_how_of.png 27.21 KB

[Assign to Layout](#) [View Library](#) [Close](#)

Then you can click <Save Order>-Button to save your setting(assign), then click <Close>

Of course, you also can change all setting(assign), by Clicking <Edit>-Button
& <Delete>-Button.

Assign Media To This Region

CHOOSE MEDIA IN SERVER [Library](#)

COMMON MEDIA [Image](#) [Video](#) [Text](#) [Webpage](#) [Weather](#) [Flash](#) [PowerPoint](#)

ADVANCED MEDIA [RTSP Video](#) [RSS News](#) [2D Barcode](#) [Data Set](#) [Embedded HTML](#) [Shell Command](#)

CUSTOMIZED MEDIA [Camera](#) [RFID Card](#) [Terminal AV InputPort](#) [Attendance Machine](#) [Counter](#)

[Edit](#) [Delete](#) [Permissions](#) [In Transition](#) [Out Transition](#)

Vienna1 (360 seconds)

[Close](#) [Save Order](#)

If you already upload the media as before, you can choose it directly from <library>

You can click <Library> -Menu

Assign Media To This Region

CHOOSE MEDIA IN SERVER [Library](#)


COMMON MEDIA [Image](#) [Video](#) [Text](#) [Webpage](#) [Weather](#) [Flash](#) [PowerPoint](#)

ADVANCED MEDIA [RTSP Video](#) [RSS News](#) [2D Barcode](#) [Data Set](#) [Embedded HTML](#) [Shell Command](#)


CUSTOMIZED MEDIA [Camera](#) [RFID Card](#) [Terminal AV InputPort](#) [Attendance Machine](#) [Counter](#)

Then, you choose correct type for filter, and find the media which you want in following media list,

Finally, pls click <+> -Button to assign it to Region
Click <Assign>-Button to finish all .

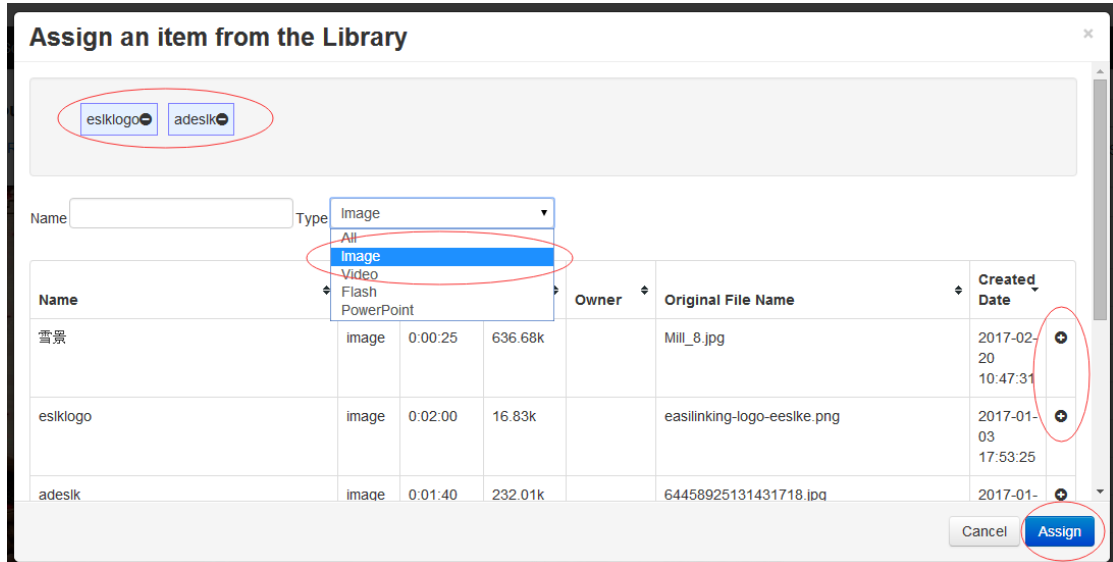


Step7 Click <Save Position>-Button to Save your all design

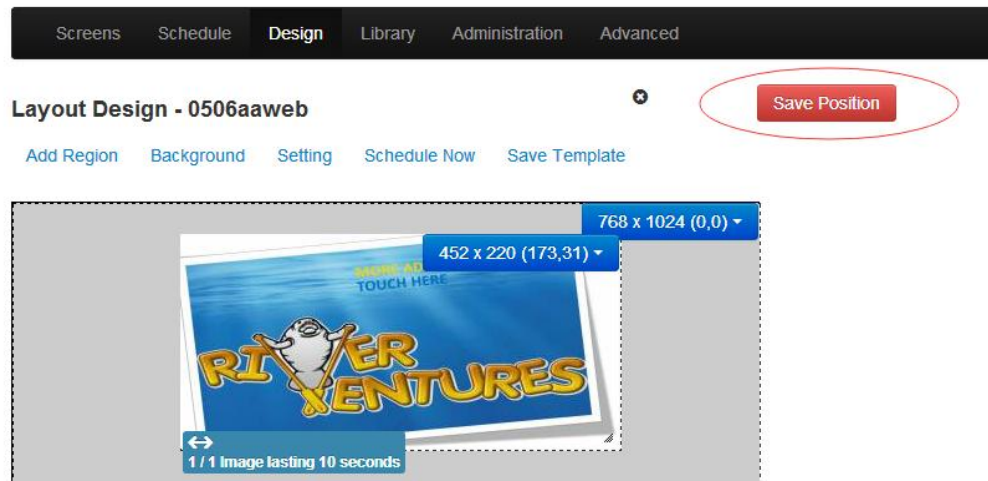

Step8 Repeat as above steps, Add some Region&Media and finished to design whole Layout

Following example is one final layout preview :

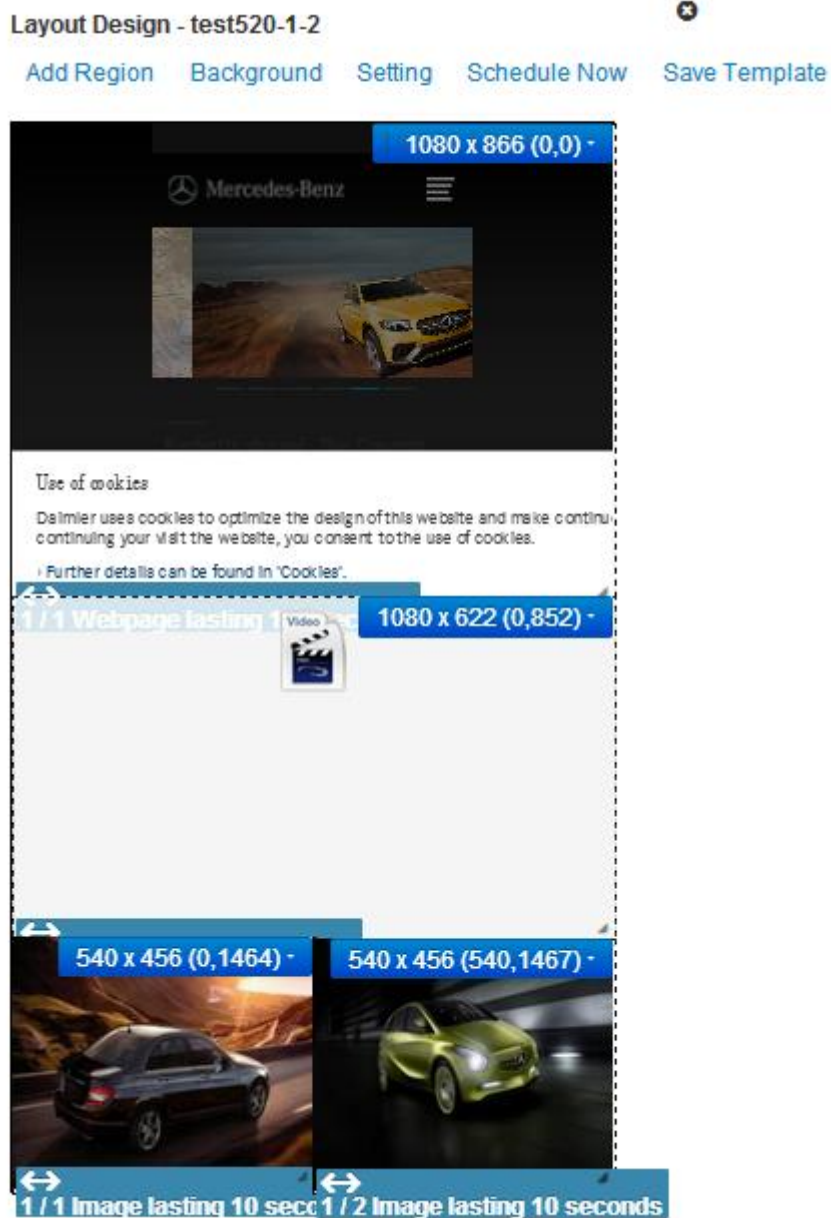

Another example of layout preview :

Layout Design - 5-21

[Add Region](#) [Background](#) [Setting](#) [Schedule Now](#) [Save Template](#)




The screenshot displays a web layout design tool interface. At the top, there's a title bar with 'SYS 深圳市研佳科技有限公司' and a resolution indicator '1050 x 1399 (0,0)'. Below the title bar are navigation tabs: 'Add Region', 'Background', 'Setting', 'Schedule Now', and 'Save Template'. The main area shows a preview of a website layout. The website has a dark blue header with navigation links. The main content area features a large image of a train and several smaller images. Below the main image, there's a section titled 'SYS 深圳市研佳科技有限公司' with a description of the company's services. At the bottom, there are two smaller preview windows showing different resolutions: '601 x 288 (0,1392)' and '456 x 288 (594,1392)'. Both smaller previews show a 'River Ventures' advertisement.

5 Send the display layout to screen/player terminal play list& schedule

Click <Screens>-Menu

Your browser can show all terminal screens, and you can manage them for all operation.


You choose one terminal screen, and click its <Operation>-Menu.

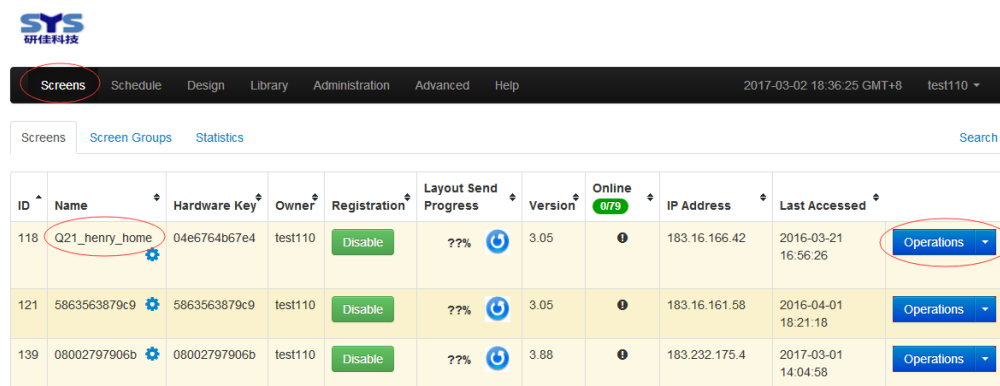

The screenshot shows the SYS web management interface. The top navigation bar includes 'Screens', 'Schedule', 'Design', 'Library', 'Administration', 'Advanced', and 'Help'. The 'Screens' menu is highlighted. Below the navigation bar, there are tabs for 'Screens', 'Screen Groups', and 'Statistics'. A table lists terminal screens with columns: ID, Name, Hardware Key, Owner, Registration, Layout Send Progress, Version, Online, IP Address, and Last Accessed. The first row is highlighted, and the 'Operations' dropdown menu is open, showing options like 'Send To Screen', 'Power Manage', 'Screen Setting', 'Wake on LAN', 'Delete Screen', and 'Screen Groups'.

ID	Name	Hardware Key	Owner	Registration	Layout Send Progress	Version	Online	IP Address	Last Accessed	Operations
118	Q21_henry_home	04e6764b67e4	test110	Disable	??%	3.05	079	183.16.166.42	2016-03-21 16:56:26	Operations
121	5863563879c9	5863563879c9	test110	Disable	??%	3.05	079	183.16.161.58	2016-04-01 18:21:18	Operations
139	08002797906b	08002797906b	test110	Disable	??%	3.88	079	183.232.175.4	2017-03-01 14:04:58	Operations


Click <Operation>-DropMenu, then Click “Send To Schedule”-Button

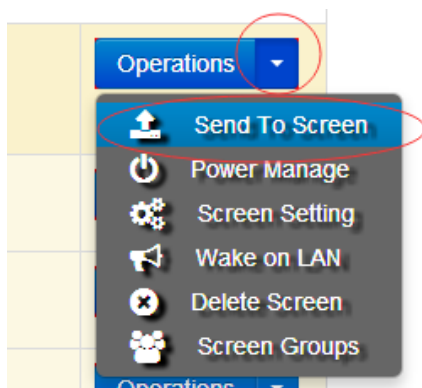

Fill <Duration>-EditBox (**we suggest you should use default setting**) , and choose one Layout, and choose terminal screens, and Click <Save>-Button

Tips:


Because Time_Zone Setting in each terminal device is different, **device maybe misunderstand the <Duration> data**, we suggest you should use default setting (240hours) when first testing.

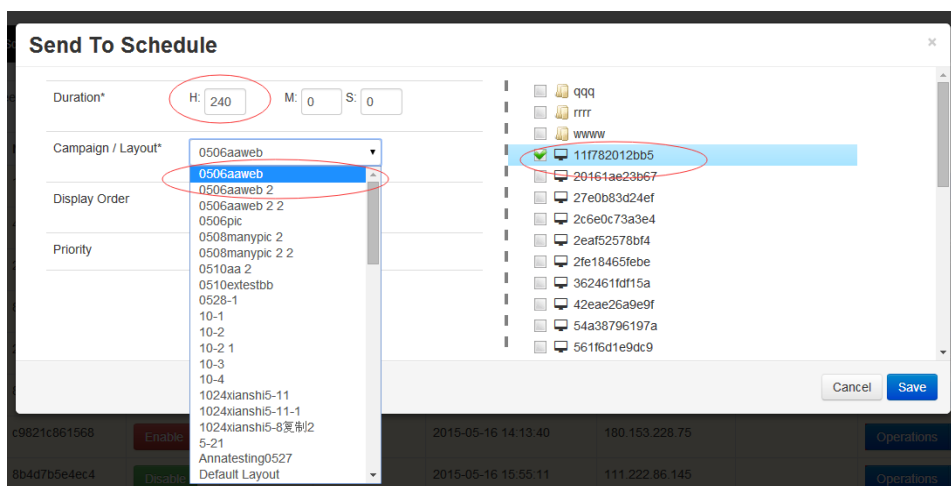

Now, we finished Send one advertisement Layout to Screens.

After Terminal screen be power on , it can connect server automatically and download the layout, then, this Screen play this Layout as your time-period define.

Following example is one screen playing :

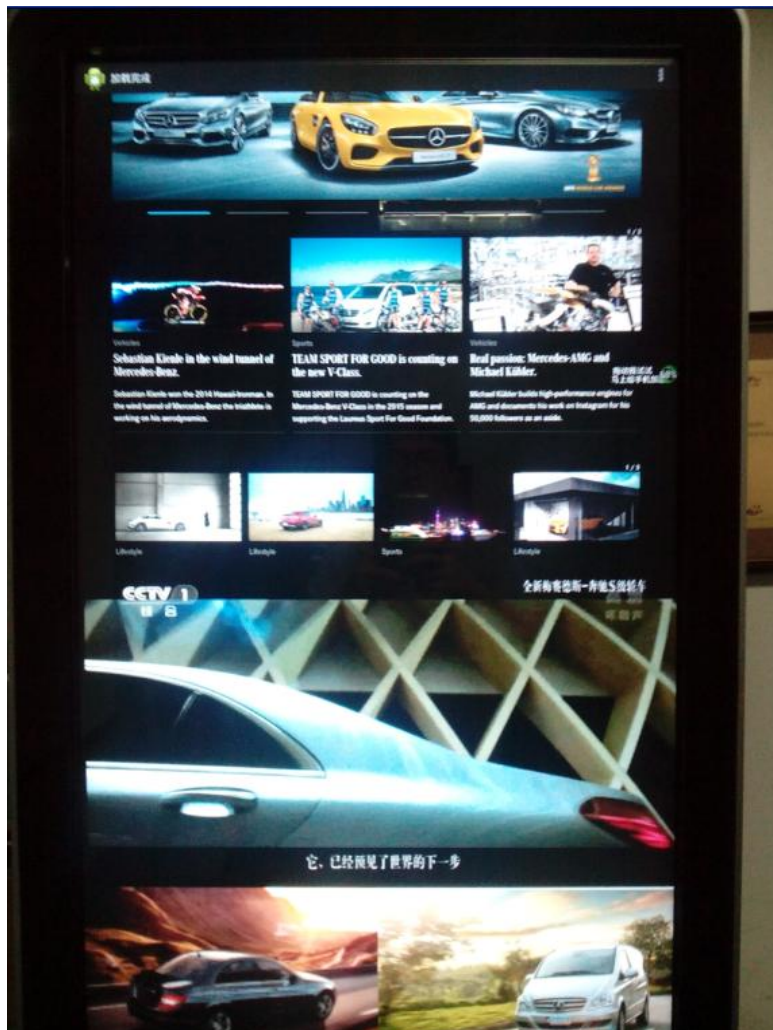


Another example for one screen playing:




6 Schedule Operation

(1) Look through Schedule Task

You can look through the overview for all schedule task by Click <Schedule> -Menu
Then you will find all device list on the left .

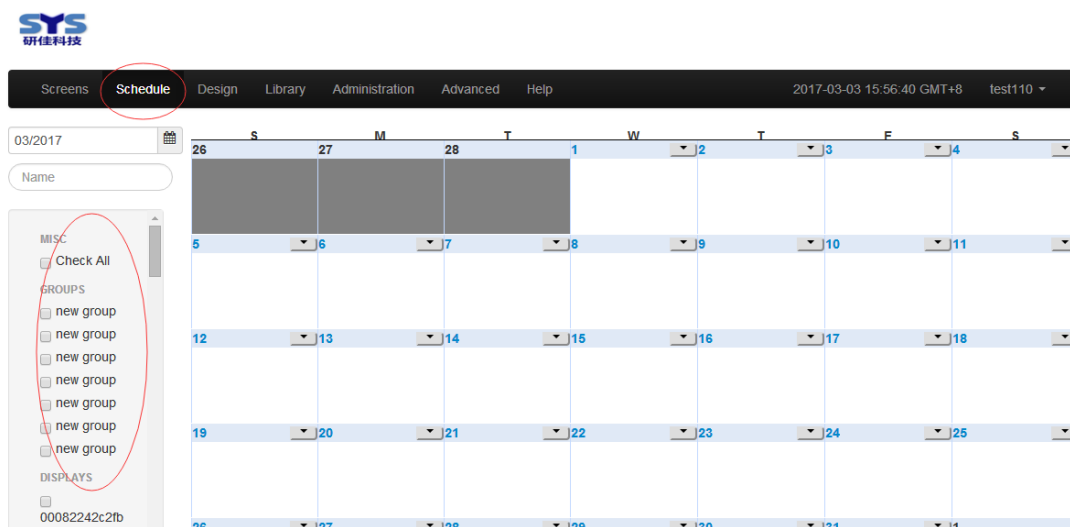


Then, you need find your device, and choose it.
It's schedule task will be shown on the right calendar.

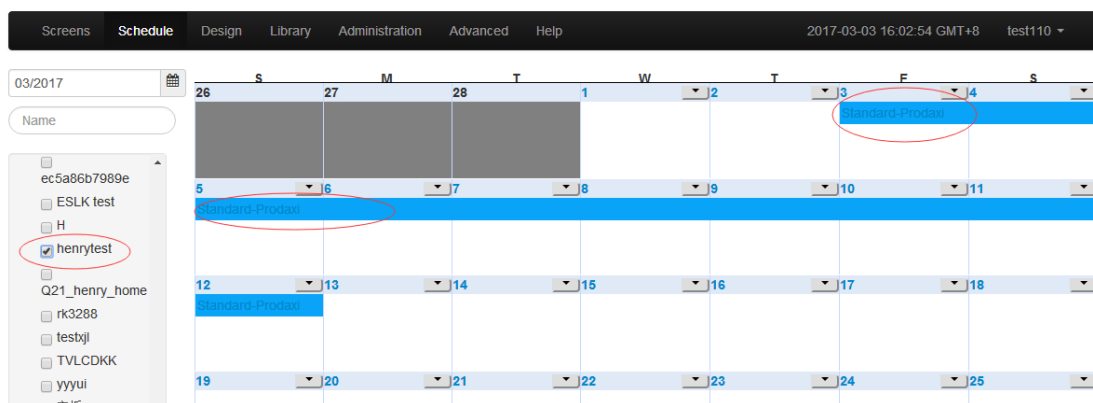

one tip: **Find one device quickly by Search .**

You can input device name into search Edit-Box, then press <Enter> -Key,


And you can get one search device list

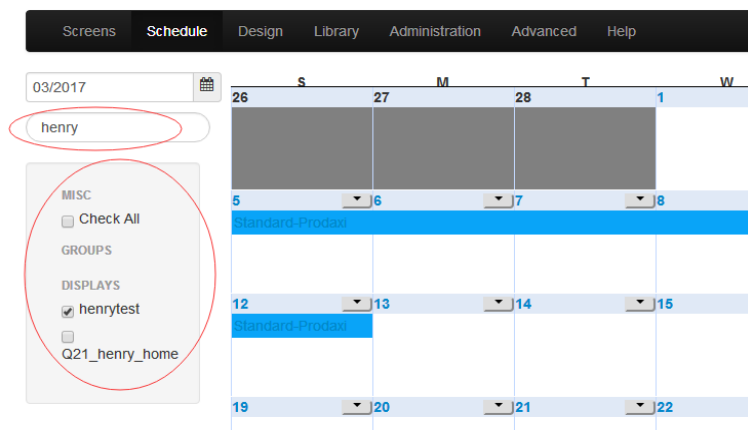

(2) Read & Edit one Schedule detail

On Calendar Table of schedule windows, you click one schedule task bar.

Then, one schedule edit windows be shown.

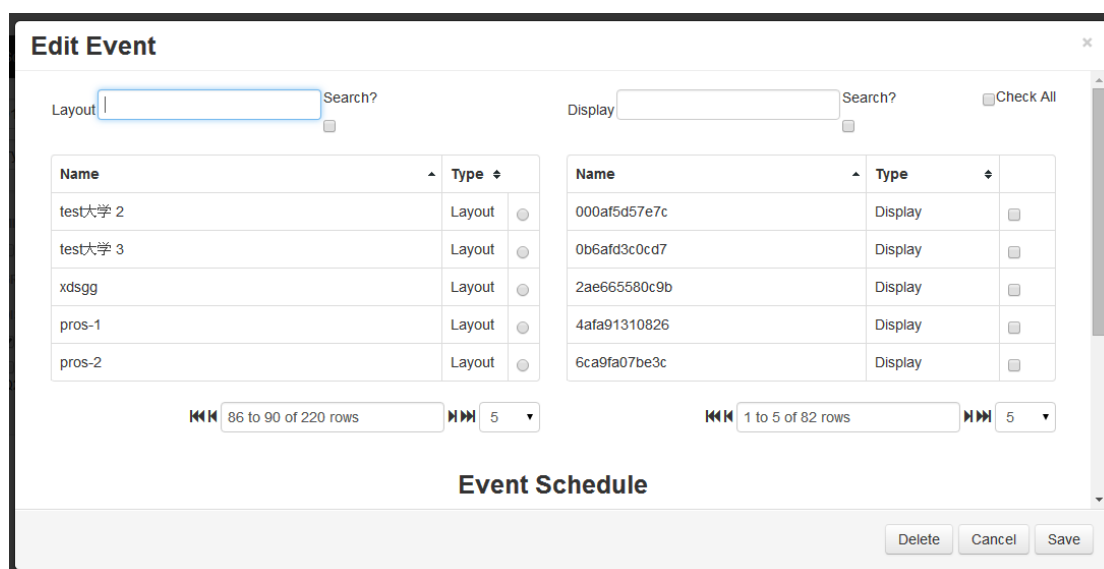

So, you can edit all setting into this windows, and click <Save> -Button to save all

(3) Delete One Schedule Task

As above operation, you can click one schedule task bar, and open one Schedule edit window. And click the <Delete> -Button to delete this schedule task

The screenshot shows the 'Edit Event' window with various fields for event configuration. At the bottom right, the 'Delete' button is circled in red, indicating the action to be taken to delete the schedule task.

(4) Set Repeat Task as preset time-period

As above operation, you can click one schedule task bar, and open one Schedule edit window. And Fill correct parameter in <Recurring Event>, then click <Save> button

If you can read our <HELP> handbook , you can get more detail for this.

The screenshot shows the 'Edit Event' window with the 'Recurring Event' section highlighted by a red oval. This section includes fields for 'Repeats' (set to 'None'), 'Repeat every' (empty), and 'Until' (set to '06/03/2017 15:28'). The 'Event Schedule' section above it shows 'Start Time' as '03/03/2017 16:02' and 'End Time' as '13/03/2017 16:02'.

7 More info & Online Support

Webpage: www.sysemed.com

Online Support:

Henry.Xu

Senior software engineer

Skype ID: [henry88pc](#)

QQ ID: 570411383

Phone: +86 755 2603 0340

+86 133 5298 5877

Mail: henry.xu@sysemed.com

SYSTECH

Address: 702, Block A, Tsinghua Hi-Tech Park, Nanshan, Shenzhen, China

Tel: 400-993-9390

Fax: 86-755-2603 0411

Post code: 518057

www.sysemed.com

End